


# Upmatic® 2513



**New and innovative**

On demand, the pre-dosing weighing buckets are swiveleable without use of any working tools. The weighing components are easily accessible for cleaning and maintenance works. This improves the user friendliness considerably.

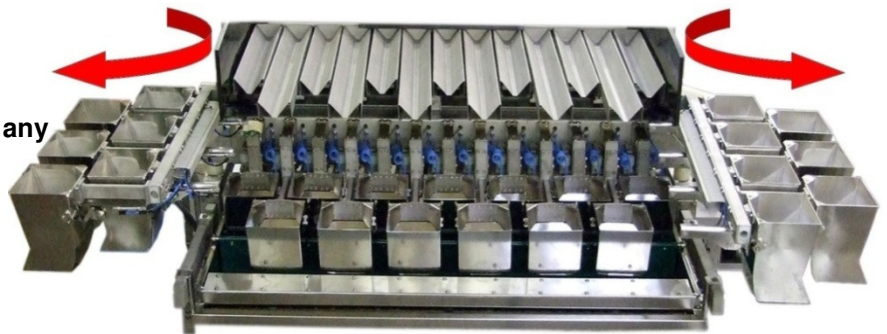


**Upmatic Typ 2513 = computer-controlled proportioning component weighing machine for fine and coarse products in the food and non-food-industries. The weighing range covers all weight classes between 0,5 and 5 kgs.**

The Upmatic 2513 convinces by high precision and his form of constructions which saves a lot of place. A feed belt conveys the product to the distributor system. Two vibrating plates ensure that the product is uniformly spread before it moves via 13 transposed arranged vibrating channels direct into predosing weighing buckets. This way, the weighing buckets are filled in a very short time.

Within a few milliseconds the high performance computer then assembles the preset weight, calling up the appropriate quantities of product. A collecting belt then feeds the batch to the appropriate filling and sealing machine. The Upmatic 2513 operates extremely reliable, with weight tolerances under 1%.

Especially for his place saving version of machine, those transposed arranged conveying channels, the predosing- and the weighing buckets have been designed. Programs tailored to specific products enable the machine to be run at high speed.

# Upmatic® 2513

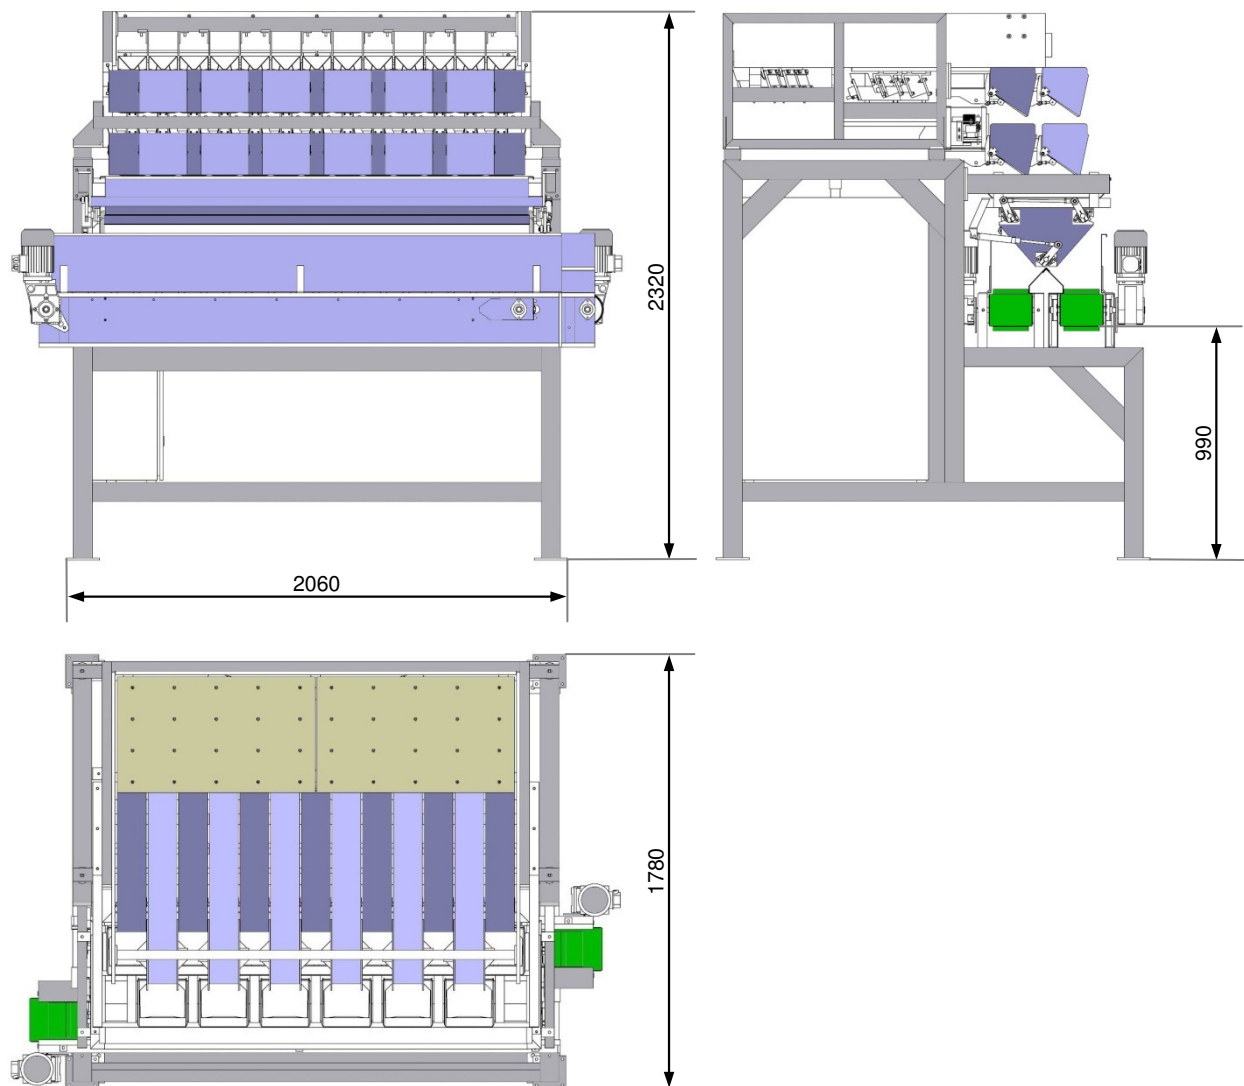

The Upmatic 2513 can be combined with all current filling and sealing machines.

The measurements may change according to individual combination with filling and closing machines.

In the interest of our customers, we reserve the right to introduce technical changes.

## Type of machines:

**Upmatic 2513:** Standard model, painted steel blue/silver hammer dimple.

See illustration and explanatory text

**Upmatic 2513E:** Machine in stainless steel otherwise, the same as type 2513.

## Technical dates:

- weighing range: 0,5 – 5 kg
- capacity: approx. 60 bags/min.
- voltage supply: 230/400V, 50Hz
- power consumption: 4kW
- air pressure: 6 bar
- air consumption: 8 l / cycle

## Accessories

- feed belts in individual sizes.
- full indicators
- chutes
- collecting belts