

Upmatic® 2309

english




Upmatic Typ 2309 = computer-controlled, proportioning component weighing machine for fine and coarse products in the food and non-food-industries. The weighing range covers all weight classes between 1 and 25 kgs – weighing without losses.

The Upmatic 2309 convinces by offering both precision and high speed. A feed belt conveys the product to nine generously sized chutes direct into the weighing containers. Within a few milliseconds the high performance computer then assembles the preset weight, calling up the appropriate quantities of product. A collecting belt then feeds the batch to the appropriate filling and sealing machine.

The Upmatic 2309 operates extremely reliable, with lowest weight tolerance, and at astonishingly high speed capacity.

A genuinely all-purpose weighing system, the Upmatic 2309 is suitable for almost any small or large food or non-food items, such as onions, potatoes, nuts, carrots, Brussels sprouts, sweets, or deep-frozen products.

Upmatic® 2309

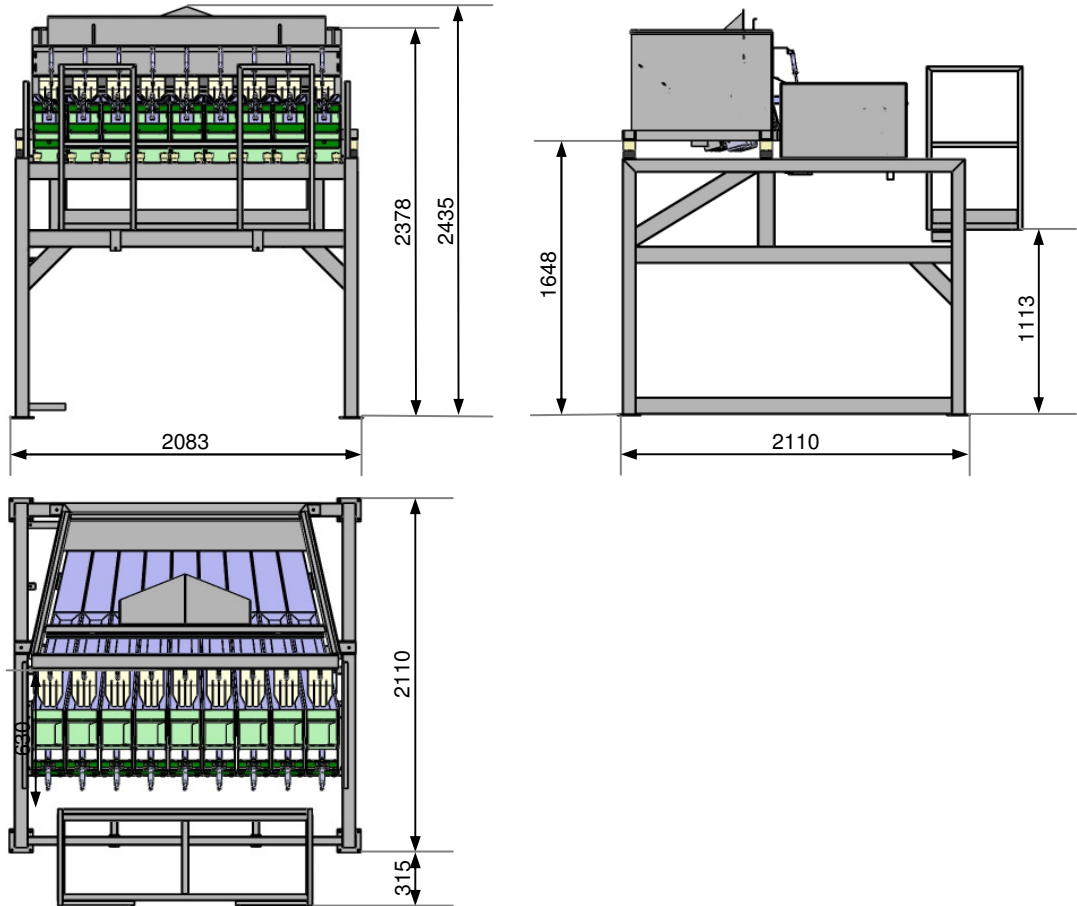

The Upmatic 2309 can be combined with all current filling and sealing machines. Upmann also supplies the associated feed belts and processing equipment to make up complete high-capacity weighing and bagging lines.

The measurements may change according to individual combination with filling and closing machines.

In the interest of our customers, we reserve the right to introduce technical changes.

Technical Data:

- weighing range: 1 - 25 kg
- Capacity:
 - 1,0 kg 35 cycles/min. approx.
 - 2,5 kg 30 cycles/min. approx.
- Supply voltage: 230/400 V, 50 Hz
- Power consumption: 4 kW
- Air pressure: 6 bar
- Network connection offers remote maintenance remote control and further service features.

Models:

Upmatic 2309: standard model, hammer dimple enamel finish blue/silver.
See illustrations and explanatory text.

Accessories:

- Feed belts in individual sizes
- Service platform, individual types
- „Full“ indicators
- Collecting belts
- Bagging nozzels
- Chutes