

# Upmatic® 2212

english



**Upmatic Type 2212 = computer controlled proportioning component weighing machine for fine and coarse products in the food and non-food industries. The weighing range covers, dependent on product, all weight classes from 100g to 5000g (higher weights by double dumps).  
- Weighing without loss.**



The Upmatic 2212 convinces by offering both precision and high speed. A feed belt conveys the product to the distributor system. Two vibrating plates "WL6" ensure that the product is uniformly spread before it moves via twelve generously sized chutes direct into the weighing containers. Within a few milliseconds the high performance computer then assembles the preset weight, calling up the appropriate quantities of product.

A collecting belt then feeds the batch to the appropriate filling and sealing machine. The Upmatic 2212 operates extremely reliable, with smallest weight tolerances and high capacity.

As real universal weighing machine the Upmatic 2212 is suitable for fine and coarse products in the food and non-food industry, such as onions, potatoes, nuts, carrots (cut or cubic), lettuce, grated celery, Brussels sprouts, sweets, or even products like fish or scampi (fresh or deep frozen).

Different programs tailored to specific products enable the machine to be run at high speed while still remaining easy to operate.

# Upmatic® 2212

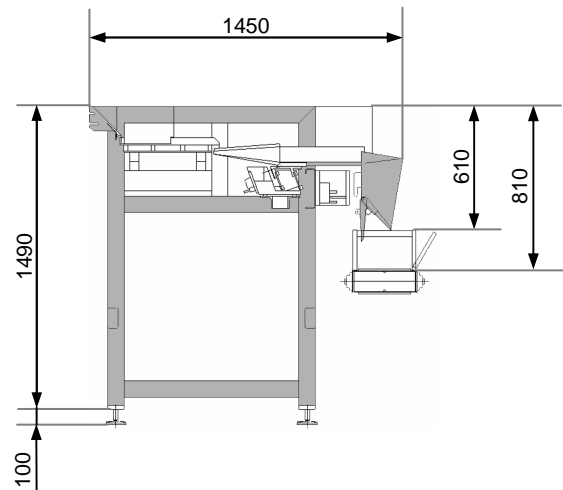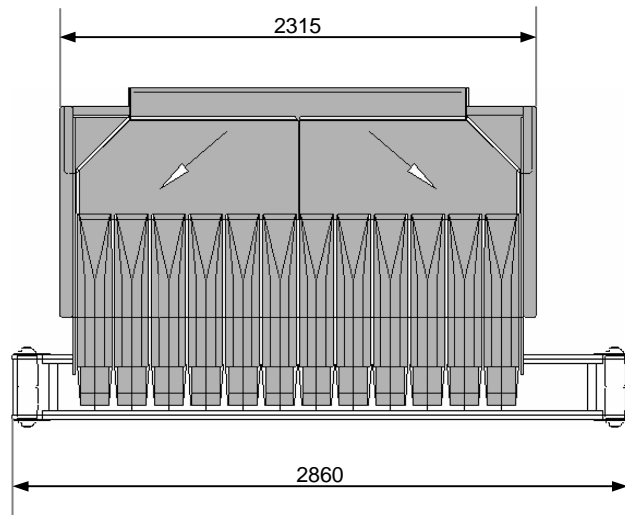

The high precision weigher Upmatic 2212 can be combined with all current filling and sealing machines. Upmann also supplies the associated feed belts as well as processing equipment to make up complete high capacity weighing and bagging lines.

The measurements may change according to individual combination with filling and closing machines.

In the interest of our customers, we reserve the right to introduce technical changes.

## Technical Data:

- Weighing range dependent on product: 100g - 5000g
- Capacity: bags of 2,5 kg ca. 28 cycles/min.
- Supply voltage: 230/400 V, 50 Hz
- Power consumption: 4 kW
- Air pressure: 6 bar
- Air consumption: 2,6 l / cycle
- Weight: 1700 kg

## Models:

**Upmatic 2212:** completely in stainless steel.. See illustration and explanatory text..

- Vibrating plates and channels in WL 6
- Weighing buckets removeable without tools.

## Accessories:

- Feed belts in individual sizes.
- Full indicators
- Chute
- Collecting belts
- Platforms in individual sizes

**UPMANN**   
**VERPACKUNGSMASCHINEN**

Burgsteinfurter Damm 185 · D-48432 Rheine-Mesum  
Telefon 0 59 75 / 92 81-0 · Telefax 0 59 75 / 92 81-10  
Internet [www.upmann.de](http://www.upmann.de) · e-mail [info@upmann.de](mailto:info@upmann.de)