

Upmatic® 2112KE

english




Upmatic 2112KE = computer-controlled, proportioning component weighing machine for fine and coarse products in the food and non-food-industries. The weighing range covers all weight classes between 0,5 and 25 kgs – weighing without losses.

The Upmatic 2112KE convinces by offering both precision and high speed. A feed belt conveys the product to the distributor system. Two vibrating plates ensure that the product is uniformly spread before it moves via 12 generously sized chutes direct into the weighing containers. Within a few milliseconds the high performance computer then assembles the preset weight, calling up the appropriate quantities of product. A collecting belt then feeds the batch to the appropriate filling and sealing machine.

The Upmatic 2112KE operates extremely reliable to a weight tolerance of less than 0,5 %, even at a astonishingly high speed of 40 cycles per minute.

A genuinely all-purpose weighing system, the Upmatic 2112KE is suitable for almost any small or large food or non-food items, such as onions, potatoes, nuts, carrots, Brussels sprouts, sweets, or deep-frozen products. Different programs tailored to specific products enable the machine to be run at high speed while still remaining easy to operate.

Upmatic® 2112KE

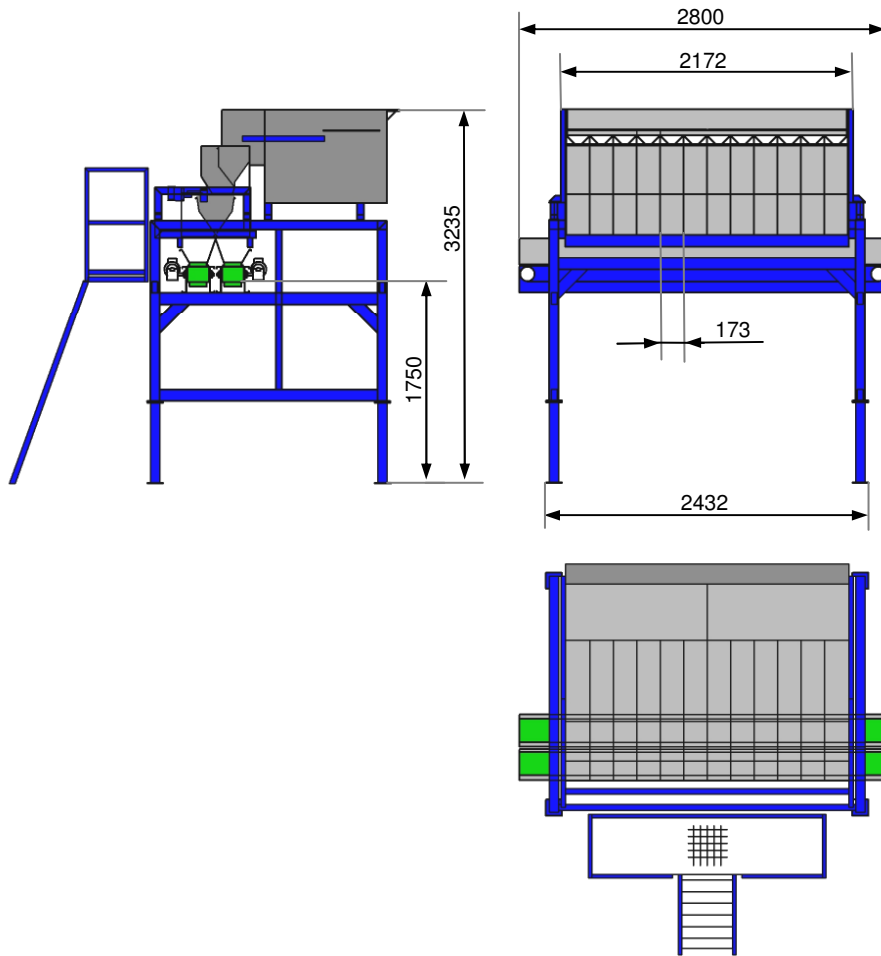

The high precision weigher Upmatic 2112KE can be combined with all current filling and sealing machines. Upmann also supplies the associated feed belts as well as processing equipment to make up complete high capacity weighing and bagging lines.

The measurements may change according to individual combination with filling and closing machines.

Type of machines:

Upmatic 2112KE:

Machine completely in stainless steel
See illustration and explanatory text.

Technical Data:

- Weighing range: 0,5 – 5 kgs
- Capacity:
bags of 5 kg approx. 16 bags/hour
Bags of 0,5 kg approx 70 bags/Min.
- Power supply : 230/400 V, 50 Hz
- Power consumption: 4 kW
- Air pressure: 6 bar
- Air consumption: 8 l / cycle
- Weight: 1800 kg
- Network connection offers remote maintenance, remote control and further service features.

Accessories:

- Feed belts in individual sizes.
- Full indicators
- Chutes
- Collecting belts
- Platforms in individual sizes

UPMANN 
VERPACKUNGSMASCHINEN

Burgsteinfurter Damm 185 · D-48432 Rheine-Mesum
☎ +49 (0) 59 75 / 92 81 - 0 · Fax +49 (0) 59 75 / 92 81 - 10
www.upmann.de · GERMANY · info@upmann.de