


Upmatic® 2402WB

englisch



Upmatic 2402WB = fully automatic filling and closing machine for polyethylene bags from 1 up to 10 kgs. Suitable for all bulk and granular products of the food and non-food industries

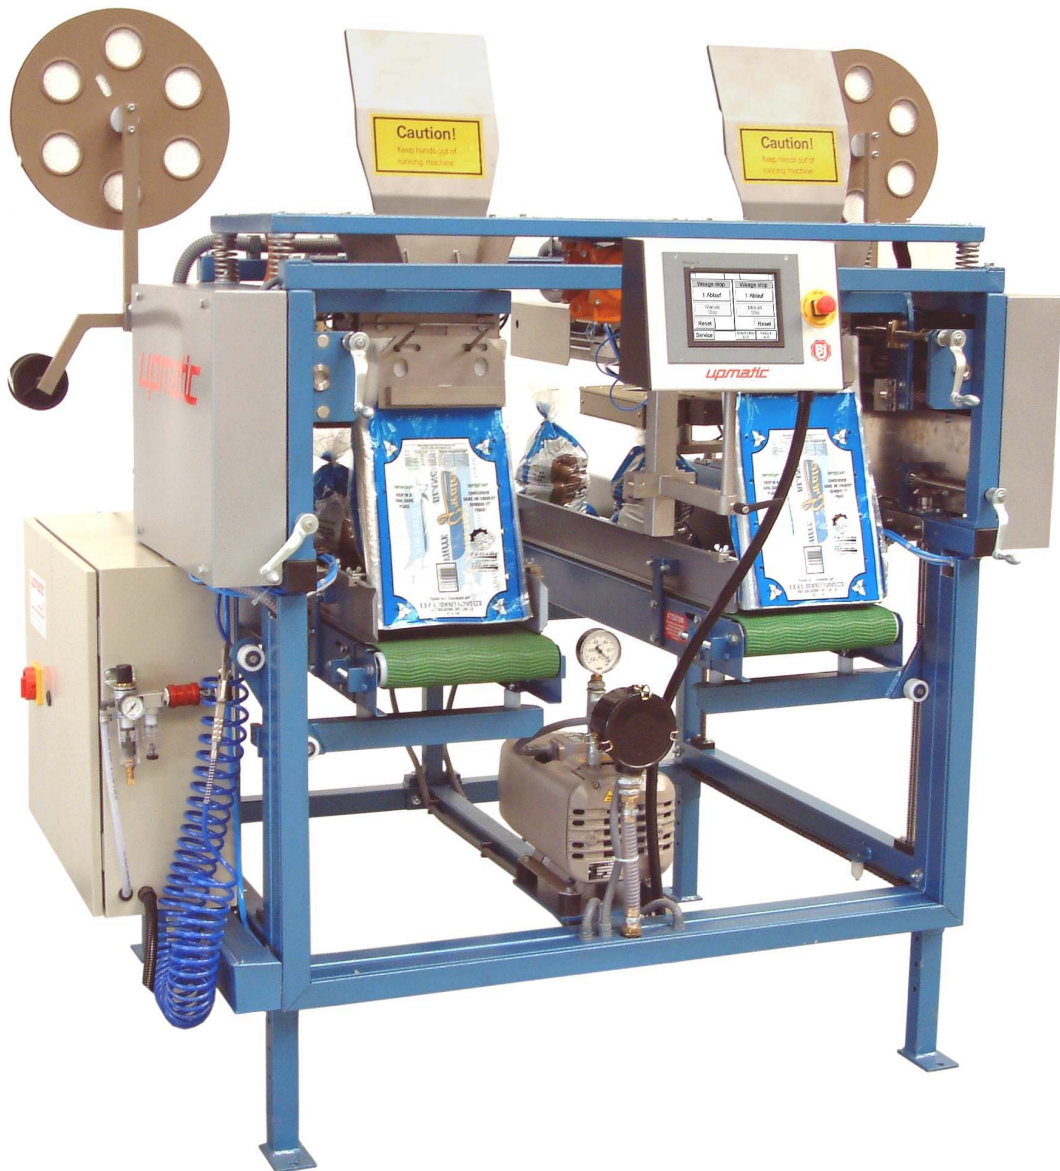


The Upmatic 2402WB is extremely rugged and very easy to operate. The pre-made bags are taken out of the bag magazine and conveyed under the filling hopper. The bags are opened pneumatically and filled. After the filling, the bag is conveyed to the closing unit, closed and transported.

All adjustments to different bag sizes can be carried out very easily without tools. The speed of the conveyor belt can be adjusted stepless.

Combinations with all common weighing and dosing equipment on the market is possible.

In our customers' interest, we reserve the right to introduce technical changes.

Upmatic® 2402WB

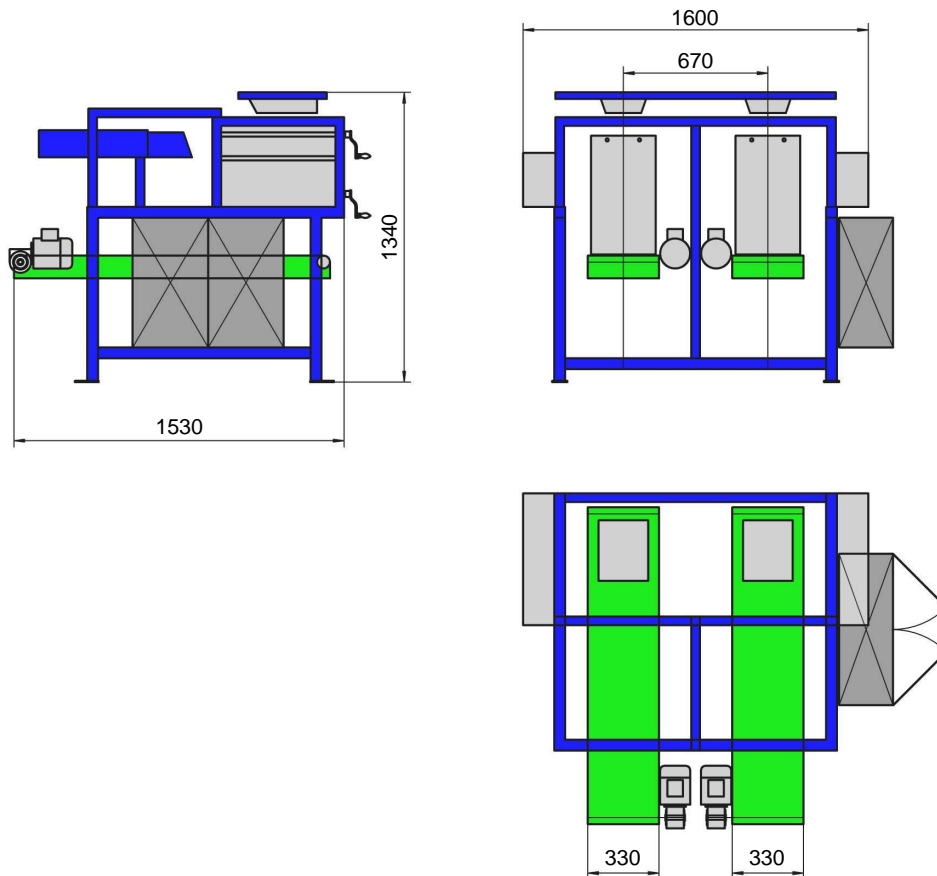

Types of machines:

Upmatic 2402WB: Standard model, painted steel, blue/silver hammer dimple enamel
See illustration and explanatory text.

Upmatic 2402WBE: machine completely in stainless steel, otherwise identical with the Upmatic 2402WB.

Accessories

- Packing transport belts in individual sizes

Technical data:

- Capacity: packages of 2,5 kg +/- 50/52 bags/min
- Bag sizes: Width 220 - 380 mm
Length 400 - 690 mm
- Power supply: 230/400 V, 50 Hz
- Air pressure: 6 bar
- Air consumption: 4l/cycle single operation
8l/cycle tandem operation
- Weight: 250 kg

UPMANN 
VERPACKUNGSMASCHINEN

Burgsteinfurter Damm 185 · D-48432 Rheine-Mesum
phone +49 59 75 / 92 81-0 · fax +49 59 75 / 92 81-10
internet www.upmann.de · e-mail info@upmann.de